

SWITCH'AIR® non-stick Four-Legged domes

Thanks to its SWITCH'AIR® process, NICOMATIC has eliminated all risk of dome sticking thus ensuring efficient automatic placement and packaging in tubes for quick and easy positioning. Nicomatic offers one of the widest product ranges on the market.

DESCRIPTION

The SWITCH'AIR® notch helps to create a cushion of air between the domes so that they no longer stick together.

ADVANTAGES


The SWITCH'AIR® non-stick domes offer :

- Excellent tactile effect even after rigorous tests (click ratio > 50%)
- Very long life expectancy : up to 5 million cycles
- Stable forces and homogeneity of forces per batch number
- Control of dimensional and mechanical characteristics
- No burrs, thus eliminating the scratching effect
- Successful and reliable automatic placement with NICOMATIC machines
- Domes in tubes save routine manual pre-separation of the domes by the operator
- The standard model is pre-nickel plated to avoid all risk of contamination
- 100% traceability per batch number

PRODUCTION CAPACITY

NICOMATIC is one of the worldwide largest manufacturers of metal domes :

- Over 100 standard references available
- On-site R&D and production
- Proprietary manufacturing process for DOME ARRAYS




SWITCH'AIR®
technology
patented
by NICOMATIC

QUALIFICATION TESTS

- Life expectancy
- Overload test (static load)
- Overstroke
- Sweet spot (position of the actuator shifted from the dome centre)
- O.S.O. test (at a time : overload, sweet spot, overstroke)
- Electrical measurement

Mechanical characteristics

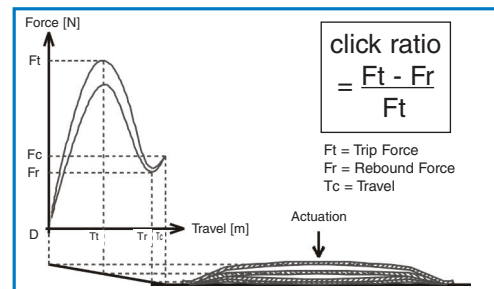


Typical force versus travel curve for a metal dome



PACKAGING

NICOMATIC SWITCH'AIR® non-stick domes can be ordered :

- In bulk quantities
- In tubes of 800 domes each*
- In tape & reel
- In sheets for custom made arrays

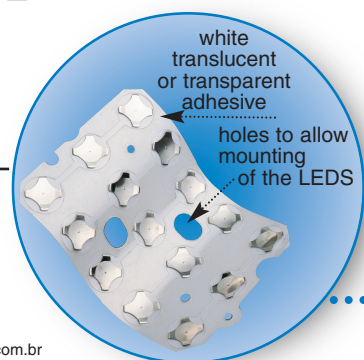

The domes are already pre-positioned on adhesive arrays according to customer configurations, ready to be placed onto the circuit.

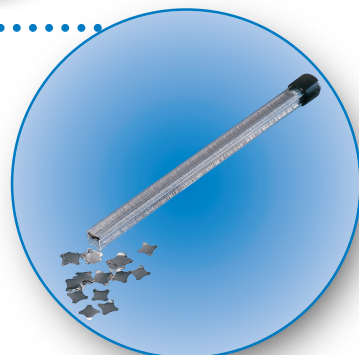

NICOMATIC INTERNATIONAL SUBSIDIARIES :

NICOMATIC NORTH AMERICA

165 Veterans Way, Unit 200
WARMINSTER, PA 18974 USA
Tel. +1 (215) 444-9580
Fax +1 (215) 444-9581
Email : sales@nicomatic.net

NICOMATIC SOUTH AMERICA

Av. Brigadeiro Faria Lima,
2.639 - cj. 10a Jardim Paulistano
01452-000 São Paulo BRAZIL
Tel. +55 11 3815-4411
Fax +55 11 3815-6133
Email : carlos.guimaraes@nicomatic.com.br

NICOMATIC CHINA

Nicomatic (Tianjin) Electronics Co. Ltd.
6A XEDA Jimel Industrial Park Xiqing
Economic & Development Area Tianjin CHINA
Tel. +86 22 238 88 050
Fax +86 22 238 88 060
Email : sales@nicomatic.cn

NICOMATIC INDIA

#21, 5th Floor, SK Vista, Rustam Bagh,
Old Airport Road, Behind Manipal Hospital,
Bangalore-560017, INDIA
Tel. +91-80-30468361
Fax +91-80-30758990
Email : india@nicomatic.com



NICOMATIC HEADQUARTERS


173, rue des Fougères / Z.I. les Bracots / F-74890 Bons-en-Chablais
Tel. +33 (0)4 50 36 13 85 - Fax +33 (0)4 50 36 11 33
Email : nicomatic@nicomatic.fr

For more information on the NICOMATIC distributor network, please visit the web site <http://www.nicomatic.com>



NICOMATIC is certified
ISO9001:2008 / EN9100:2003





SWITCH'AIR® non-stick Four-Legged domes

SERIES 4-LEG DOMES

6 MM 4L ■ With and without micro-dimple

DOME REFERENCE XXX	140	170	220
Trip force (g)	140 +/- 20	170 ⁺³⁰ / ₋₂₀	220 +/- 30
Rebound force	60 +/- 20	70 +/- 20	90 +/- 20 / -30
Height (mm)	0.30 +/- 0.08	0.35 +/- 0.08	0.35 +/- 0.05
Total travel (mm) without dimple	0.23 +/- 0.08	0.28 +/- 0.08	0.28 +/- 0.05
Total travel (mm) with dimple	0.215 +/- 0.08	0.265 +/- 0.08	0.25 +/- 0.05
Foot print (mm)	5.40 +/- 0.08	5.40 +/- 0.08	5.40 +/- 0.08
Diameter (mm)	6 ⁺⁰ / _{-0.20}	6 ⁺⁰ / _{-0.20}	6 ⁺⁰ / _{-0.20}
Square size (mm)	4.80 +/- 0.08	4.80 +/- 0.08	4.80 +/- 0.08
Click ratio (%)	40 - 70 %	40 - 70 %	50 - 80 %

8.4 MM 4L ■ With and without dimple

DOME REFERENCE XXX	220	280	340	400
Trip force (g)	220 +/- 30	280 +/- 30	340 +/- 40	400 +/- 40
Rebound force	90 +/- 30	90 +/- 30	130 +/- 40	150 +/- 40
Height (mm)	0.45 +/- 0.10	0.50 +/- 0.10	0.60 +/- 0.10	0.50 +/- 0.05
Total travel (mm) without dimple	0.37 +/- 0.10	0.42 +/- 0.10	0.52 +/- 0.10	0.40 +/- 0.05
Total travel (mm) with dimple	0.33 +/- 0.10	0.38 +/- 0.10	0.48 +/- 0.10	0.38 +/- 0.05
Foot print (mm)	8.00 +/- 0.10	8.00 +/- 0.10	8.00 +/- 0.10	8.00 +/- 0.10
Diameter (mm)	8.4 ⁺⁰ / _{-0.20}	8.4 ⁺⁰ / _{-0.20}	8.4 ⁺⁰ / _{-0.20}	8.4 ⁺⁰ / _{-0.20}
Square size (mm)	7.00 +/- 0.10	7.00 +/- 0.10	7.00 +/- 0.10	7.00 +/- 0.10
Click ratio (%)	40 - 70 %	50 - 80 %	50 - 80 %	50 - 80 %

10 MM 4L ■ With and without dimple

DOME REFERENCE XXX	220	280	340	400
Trip force (g)	220 +/- 30	280 +/- 30	340 +/- 40	400 +/- 40
Rebound force (g)	90 +/- 30	90 +/- 30	100 +/- 30	100 +/- 40
Height (mm)	0.65 ⁺⁰ / _{-0.20}	0.65 ⁺⁰ / _{-0.20}	0.70 ⁺⁰ / _{-0.20}	0.70 ⁺⁰ / _{-0.20}
Total travel (mm) without dimple	0.55 ⁺⁰ / _{-0.20}	0.55 ⁺⁰ / _{-0.20}	0.60 ⁺⁰ / _{-0.20}	0.60 ⁺⁰ / _{-0.20}
Total travel (mm) with dimple	0.50 ⁺⁰ / _{-0.20}	0.50 ⁺⁰ / _{-0.20}	0.55 ⁺⁰ / _{-0.20}	0.55 ⁺⁰ / _{-0.20}
Foot print (mm)	9.50 +/- 0.20	9.50 +/- 0.20	9.50 +/- 0.20	9.50 +/- 0.20
Diameter (mm)	10 ⁺⁰ / _{-0.20}	10 ⁺⁰ / _{-0.20}	10 ⁺⁰ / _{-0.20}	10 ⁺⁰ / _{-0.20}
Square size (mm)	8.40 ⁺⁰ / _{-0.20}	8.40 ⁺⁰ / _{-0.20}	8.40 ⁺⁰ / _{-0.20}	8.40 ⁺⁰ / _{-0.20}
Click ratio (%)	40 - 70 %	50 - 80 %	60 - 80 %	60 - 85 %

12.2 MM 4L ■ With and without dimple

DOME REFERENCE XXX	220	280	340	420
Trip force (g)	220 +/- 30	280 +/- 30	340 +/- 40	420 +/- 40
Rebound force (g)	85 +/- 20	90 +/- 30	100 +/- 30	120 +/- 40
Height (mm)	0.70 ^{+0.05} / _{-0.10}	0.75 +/- 0.05	0.75 +/- 0.05	0.80 +/- 0.05
Total travel (mm) without dimple	0.60 ^{+0.05} / _{-0.10}	0.65 +/- 0.05	0.65 +/- 0.05	0.70 +/- 0.10
Total travel (mm) with dimple	0.56 ^{+0.05} / _{-0.10}	0.61 +/- 0.05	0.61 +/- 0.05	0.66 +/- 0.10
Foot print (mm)	11.70 +/- 0.20	11.70 +/- 0.20	11.70 +/- 0.20	11.70 +/- 0.20
Diameter (mm)	12.20 ⁺⁰ / _{-0.20}	12.20 ⁺⁰ / _{-0.20}	12.20 ⁺⁰ / _{-0.20}	12.20 ⁺⁰ / _{-0.20}
Square size (mm)	9.90 +/- 0.10	9.90 +/- 0.10	9.90 +/- 0.10	9.90 +/- 0.10
Click ratio (%)	40 - 70 %	50 - 80 %	50 - 80 %	50 - 80 %

MATERIAL

- Stainless steel
- RoHS directive compliant
- REACH regulations compliant

PLATING


- Nickel plated standard model (-21)
- Optional one side gold plated (-31)

ENVIRONMENTAL

- Storage temperature from -55°C to + 125°C
- Operating temperature from -40°C to + 105°C

ELECTRICAL

- Switching voltage 0.1 to 100 V Dc
- Switching current 5µ A to 100 mA Dc
- Contact resistance < 100 mΩ
- Switching capacity 1 W

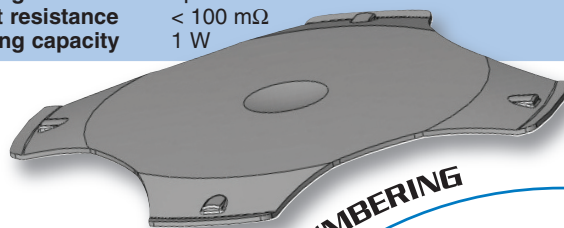

PART NUMBERING

